




EMERGENCY

EXIT & SAFETY

LED LAMP

Technical Drawing

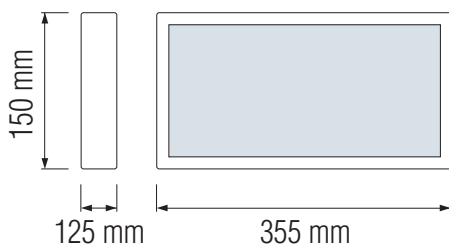

Technical Data

Voltage	220-240V / 50-60Hz
Battery type	1.2V 350mAh Rechargeable Ni-Cd Battery
Charging Time	24 Hours
Duration Time	2 Hours
Protection Class	I
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	50
Rated Life (hrs) ⌚	20.000 Hrs
IP Rating	20

Applications

- Designed indoor applications



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- LED Lamp Base.
- Innovative Design of Assembly Structure
- Emergency and Automatic Light-Up

