



# LED PANEL




BACKLIGHT PANEL

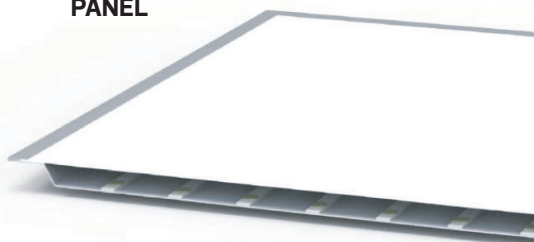

## Technical Drawing



## Photometric Diagram

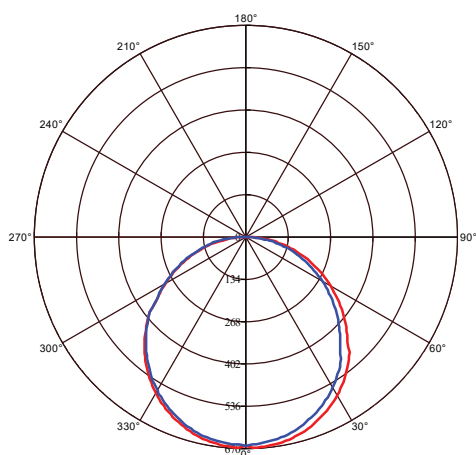

☑ C0 Plane beam angle(50%) ☑ C90 Plane beam angle(50%)


C0 Plane beam angle(50%):112.6(DEG) C90 Plane beam angle(50%):110.2(DEG)

## Technical Data

Voltage (V)	220-240V~50-60Hz
Product Wattage (W)	40W
Equivalence with incandescent lamp	360
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4200K / 6400K
Materials	Aluminium + PS
Protection Class	II
Dimmable	No
EEI	A to A <sup>++</sup>
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	3375
Luminous Efficacy (lm/W)	75
Rated Life (hrs) ⌚	25.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

## Applications

- Indoor applications; Business Center, Airport, Car Park, Cinema, Gallery, Hospital, Hotel, Museum etc.

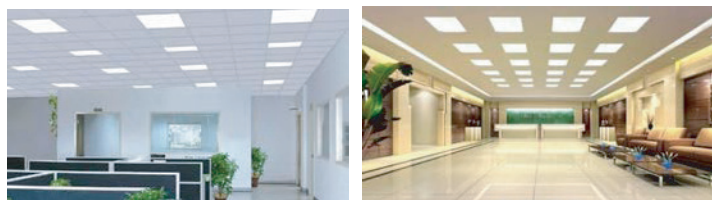

## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.

